

Speed Queen® Multi-Housing

Electronic Commercial Homestyle Top Load Washer

Rear Control




BUILT FOR RELIABLE PERFORMANCE


- U.S. DOE compliance for energy and water efficiencies
- Durable stainless steel washtub
- Automatic balancing suspension system
- Extract speed of 710 RPM spins clothes out drier
- Curved four-vane polypropylene agitator
- Self-adjusting leveling legs
- Low water consumption

ELECTRONIC CONTROL

- Cycle indicator lights
- Three wash temperatures
Hot, warm, cold
- Three load sizes
Small, medium, large
- Three soil levels
Light, medium, heavy

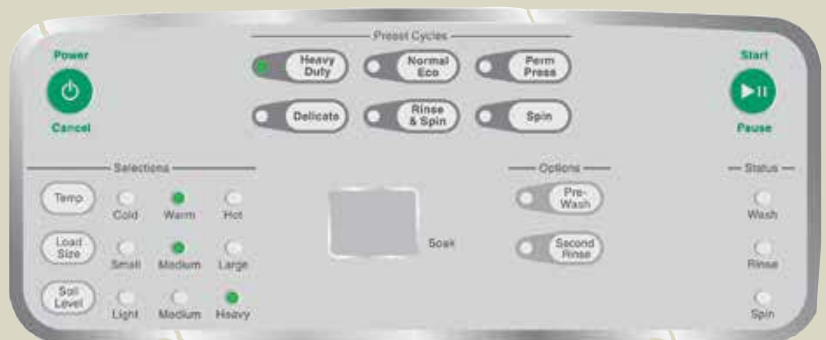

ELECTRONIC HOMESTYLE COMMERCIAL TOP LOAD WASHER SPECIFICATIONS

MODELS	LWNE52PP113TW01	LWNE52SP113TW01	LWNE52WP113TW01
			
Available Control Location	Rear	Rear	Rear
Capacity - lb (kg)	16 (7.3)	16 (7.3)	16 (7.3)
Cylinder Volume - cu. Ft. (liters)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)
Width - in (mm)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)
Depth - in (mm)	28 (711)	28 (711)	28 (711)
Height - in (mm)	43 (1092)	43 (1092)	43 (1092)
Spin Speed G-Force (RPM)	150 (710)	150 (710)	150 (710)
Motor Size - HP (kw)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)
Water Consumption per Cycle - g (liter)	24.3 (92.2)	24.3 (92.2)	24.3 (92.2)
WF (Water Factor) gal/ft³ (Liters/Liter/cycle)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)
MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)	1.29 (53.36)	1.29 (53.36)	1.29 (53.36)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Normal, Perm Press, Delicates		
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes	Yes
Cylinder Finish	Blue Porcelain	Stainless Steel	White Porcelain
Available Colors	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp
Net Weight - lb (kg)	190 (86)	190 (86)	190 (86)
Shipping Weight - lb (kg)	210 (95)	210 (95)	210 (95)
Shipping Width - in (mm)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)
Shipping Depth - in (mm)	30 (762)	30 (762)	30 (762)
Shipping Height - in (mm)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)
Available Agency Approvals	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

