

Speed Queen® Multi-Housing

Electronic Commercial Homestyle Single Load Dryer

Front Control



BUILT FOR RELIABLE PERFORMANCE


- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- ADA compliant
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

ELECTRONIC CONTROL

- Easy-to-use touchpad control
- Equipped with moisture sensing
- Three temperature settings
- Three moisture settings




ELECTRONIC HOMESTYLE COMMERCIAL SINGLE LOAD DRYER SPECIFICATIONS

MODELS	
	
LDEE5BGS153TW01 LDEE5BGS173TW01 LDGE5BGS113TW01	
Available Control Location	Front
Activation Type	Electronic
Capacity - lb (kg)	18 (8.2)
Cylinder Volume - cu. Ft. (liters)	7.0 (198)
Width - in (mm)	26 7/8 (683)
Depth - in (mm)	28 (711)
Height - in (mm)	40 7/16 (1027)
Motor Size (Variable Speed Induction) - HP (kw)	1/3 (0.25)
Available Heat Sources	Electric Gas
Available Heating Element - (Electric)	5350W, 240V 4750W, 208V
Gas Inlet Connection - in (mm)	3/8 (9.5)
Gas Consumption - BTU/Hr	25,000
Exhaust Outlet Dia. - in (mm)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)
Available Cycles	Regular, Delicate, No Heat
Cylinder Finish	Galvanized
Available Colors	White
Available Electrical Requirements (v/Hz/Ph-Amp)	Elec 240/60/1 30 amp* 208/60/1 Gas 120/60/1 15 amp
Net Weight - lb (kg)	Elec 150 (68) Gas 140 (64)
Shipping Weight - lb (kg)	Elec 160 (73) Gas 165 (75)
Shipping Width - in (mm)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)
Available Agency Approvals	Elec cULus Gas cCSAus

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.

** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

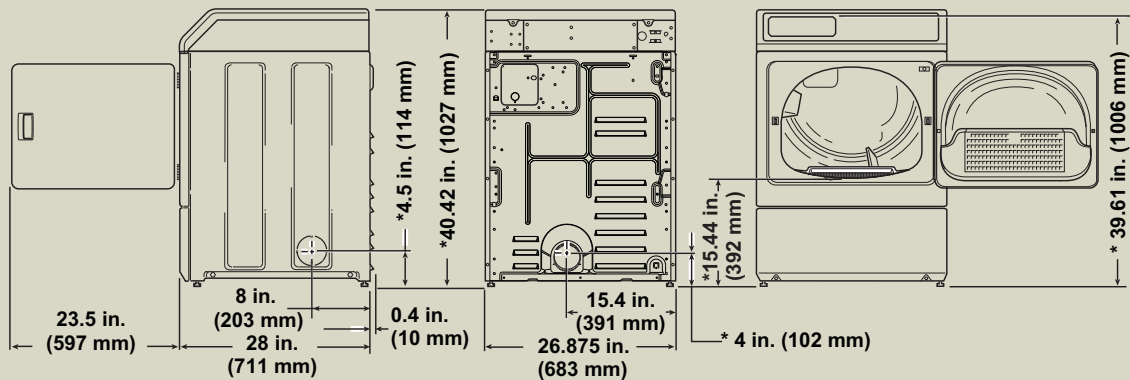

* With leveling legs turned into base.

NOTE: Exhaust openings are 102 mm (4 inch) metal ducting.

DRY2638N