

# Speed Queen® Multi-Housing

Electronic

## Commercial Homestyle Front Load Washer

Front Control




ENERGY STAR® Certified

### BUILT FOR RELIABLE PERFORMANCE


- Suspension with out-of-balance logic
- Industry leading 1200 spin speed exerts 440 g-force extraction
- U.S. DOE compliance for energy and water efficiencies
- ADA compliant
- Commercial-grade stainless steel washtub
- Extra-wide 15.5" door opening and 180° door swing
- Four compartment supply dispenser

### ELECTRONIC CONTROL

- Cycle indicator lights
- Three wash temperatures  
Hot, warm, cold
- Three soil levels  
Light, medium, heavy
- Digital display

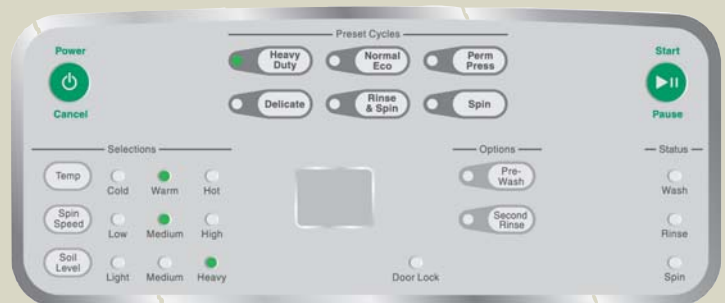

# ELECTRONIC HOMESTYLE COMMERCIAL FRONT LOAD WASHER SPECIFICATIONS

MODELS	LFNE5BSP113TW01	LFNE5BJP113TW01
		
Available Control Location	Rear	Rear
Activation Type	Electronic	Electronic
Capacity - lb (kg)	21.5 (9.5)	21.5 (9.5)
Cylinder Volume - cu. Ft. (liters)	3.42 (96.8)	3.42 (96.8)
Width - in (mm)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	27 3/4 (704)	27 3/4 (704)
Height - in (mm)	40 7/16 (1027)	40 7/16 (1027)
Spin Speed G-Force (RPM)	440 (1200)	440 (1200)
Motor Size (Variable Speed Induction) - HP (kw)	0.9 (0.67)	0.9 (0.67)
Water Consumption per Cycle - g (liter)	11.7 (44.3)	11.7 (44.3)
WF (Water Factor) gal/ft³ (Liters/Liter/cycle)	3.7 (0.50)	3.7 (0.50)
MEF (Modified Energy Factor) - ft³/kWh/cycle (Liters/kWh/cycle)	2.38 (82.29)	2.38 (82.29)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes
Cylinder Finish	Stainless Steel	Stainless Steel
Available Colors	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	120/60/1 - 15 Amp
Net Weight - lb (kg)	250 (113)	250 (113)
Shipping Weight - lb (kg)	270 (122)	270 (122)
Shipping Width - in (mm)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)	45 1/2 (1156)
Supply Injection	-	Yes
Available Agency Approvals	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

