

Speed Queen® Multi-Housing

Electronic Commercial Homestyle Stack Washer/Dryer

Front Control



ENERGY STAR® Certified
Washer

BUILT FOR RELIABLE PERFORMANCE

- U.S. DOE compliance for energy and water efficiencies
- ADA compliant (washer only)
- Suspension with out-of-balance logic
- Industry leading 1200 spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Four compartment supply dispenser
- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured


ELECTRONIC CONTROL

WASHER


- Cycle indicator lights
- Three wash temperatures - Hot, warm, cold
- Three soil levels - Light, medium, heavy
- Digital display

DRYER

- Easy-to-use touchpad control
- Equipped with moisture sensing
- Three temperature settings
- Three moisture settings

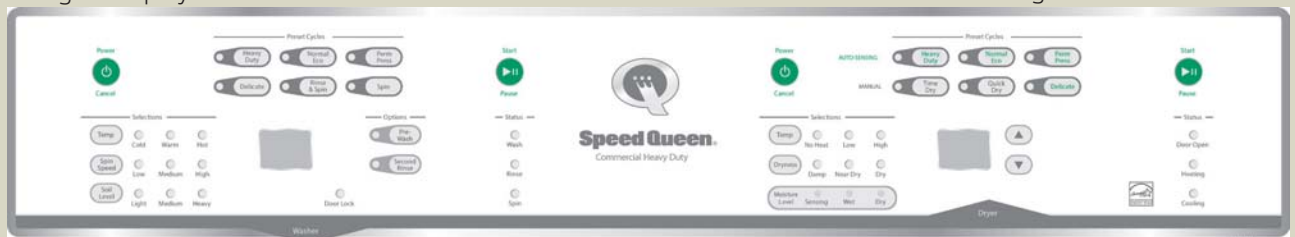

ELECTRONIC HOMESTYLE COMMERCIAL STACK WASHER/DRYER SPECIFICATIONS

MODELS	
LTEE5AGW1 73TW01 LTEE5AGW153TW01 LTGE5AGW1 13TW01	
	
Available Control Location	Front
Activation Type	Electronic
Capacity - lb (kg)	21.5 (9.5) (w) 18 (18.2) (d)
Cylinder Volume - cu. Ft. (liters)	3.42 (96.8) (w) 7.0 (198) (d)
Width - in (mm)	26 7/8 (683)
Depth - in (mm)	28 (711) (ea)
Height - in (mm)	78 3/16 (1986)
Spin Speed G-Force (RPM) (w)	440 (1200)
Motor Size (Variable Spd Induction) - HP (kw) (w)	0.9 (0.67) 1/3 (0.25) (ea)
Water Consumption per Cycle - g (liter) (w)	11.7 (44.3)
WF (Water Factor) gal/ft ³ (Liters/Liter/cycle) (w)	3.8 (0.52)
MEF (Modified Energy Factor) - ft ³ /kWh/cycle (Liters/kWh/cycle) (w)	2.98 (84.48) N/A (d)
Available Heat Sources - (d)	Electric or Gas
Available Heating Element - (Electric) (d)	5350W, 240V 4750W, 208V
Gas Inlet Connection - in (mm) (d)	3/8 (9.5) (d)
Gas Consumption - BTU/Hr (d)	25,000 (d)
Exhaust Outlet Dia. - in (mm) (d)	4 (102) (d)
Exhaust Airflow - cfm (liters/sec) (d)	220 (105) (d)
Available Cycles	Normal, Perm Press, Del (w) High, Med, Low, Del, No Heat (d)
Water Pressure - PSI (Bar) (w)	20-120 (1.4/8.3) (w)
Cycle Indicator Lights	Yes
Cylinder Finish	Stainless Steel (w) Galvanized (d)
Available Colors	White
Available Electrical Requirements (v/Hz/Ph-Amp) (d)	Elec 240/60/1 30 amp* 208/60/1 30 amp Gas 120/60/1 15 amp
Net Weight - lb (kg)	390 (177)
Shipping Weight - lb (kg)	425 (193)
Shipping Width - in (mm)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)
Shipping Height - in (mm)	80 (2032)
Available Agency Approvals	Elec cULus Gas cCSAus

NOTE: Stack washer/dryer requires two power cords. One for washer, one for dryer.

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. (Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

